MODEL: DG

OPERATING INSTRUCTION AND PARTS MANUAL

- **DG-2323**
- **DG-2324**
- **DG-2527**
- **DG-3030**
- **DG-3532**
- **DG-3835**
- **DG-2123**

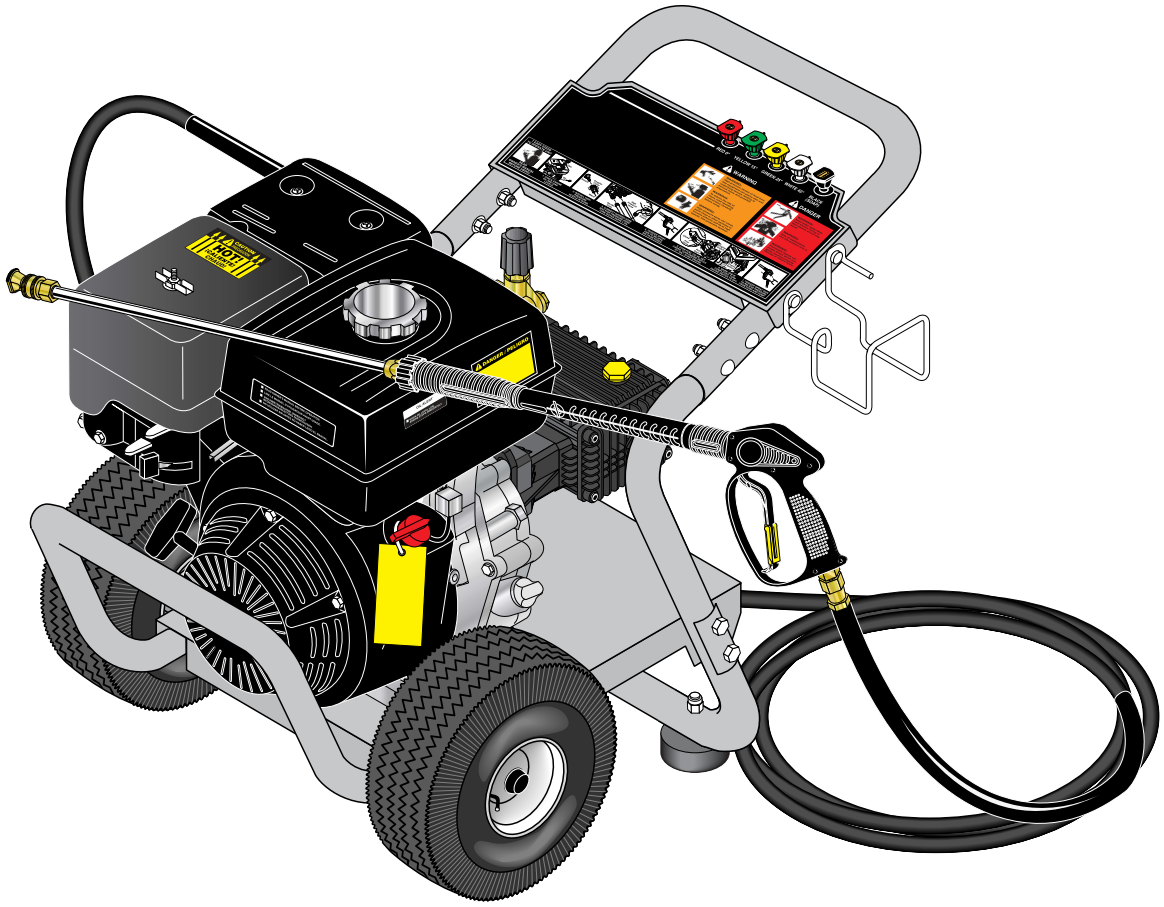

For technical assistance or the SHARK dealer nearest you, call 1-800-771-1881
or visit our website at www.shark-pw.com

97-720

CONTENTS

Important Safety Information 3-4
Component Identification 5
Assembly Instructions 6
Operating Instructions 7-8
Applying Detergent and General Operating Techniques 9
Shut Down and Clean-Up 10
Storage 10
Troubleshooting 11-12
Preventative Maintenance 13
Oil Change Record 13
Exploded View 14
Exploded View Parts List 15
Warranty

Model Number _____

Serial Number _____

Date of Purchase _____

The model and serial numbers will be found on a decal attached to the pressure washer. You should record both serial number and date of purchase and keep in a safe place for future reference.

IMPORTANT SAFETY INSTRUCTIONS

We reserve the right to make changes at any time without incurring any obligation.

⚠ CAUTION

READ OPERATOR'S MANUAL THOROUGHLY PRIOR TO USE.

CAUTION: To reduce the risk of injury, read operating instructions carefully before using.

1. Read the owner's manual thoroughly. Failure to follow instructions could cause malfunction of the machine and result in death, serious bodily injury and/or property damage. Know its applications, its limitations and any hazards involved.

Owner/User Responsibility:

The owner and/or user must have an understanding of the manufacturer's operating instructions and warnings before using this pressure washer. Warning information should be emphasized and understood. If the operator is not fluent in English, the manufacturer's instructions and warnings shall be read to and discussed with the operator in the operator's native language by the purchaser/owner, making sure that the operator comprehends its contents.

Owner and/or user must study and maintain for future reference the manufacturers' instructions.

This manual should be considered a permanent part of the machine and should remain with it if resold.

When ordering parts, please specify model and serial number.

⚠ WARNING

RISK OF ASPHYXIATION. USE ONLY IN WELL VENTILATED AREA.

DANGER: Risk of asphyxiation. Use this product only in a well ventilated area.

2. Avoid installing machines in small areas or near exhaust fans. Exhaust contains poisonous carbon monoxide gas; exposure may cause loss of consciousness and may lead to death. It also contains chemicals known, in certain quantities, to cause cancer, birth defects, or other reproductive harm.

⚠ WARNING

RISK OF FIRE. DO NOT USE WITH FLAMMABLE LIQUIDS.

WARNING: Flammable liquids can create fumes which can ignite causing property damage or severe injury.

WARNING: Risk of fire. Do not add fuel when the product is operating.

WARNING: Risk of explosion — do not spray flammable liquids.

3. Transport/repair with fuel tank EMPTY or with fuel shut-off valve OFF.
4. Do not place machine near flammable objects as the engine is hot.
5. Allow engine to cool for 2 minutes before refueling. If any fuel is spilled, make sure the area is dry before testing the spark plug or starting the engine. (Fire and/or explosion may occur if this is not done.)

   Gasoline engines on mobile or portable equipment shall be refuelled:

   (a) outdoors;

   (b) with the engine on the equipment stopped;

   (c) with no source of ignition within 10 feet of the dispensing point; and

   (d) with an allowance made for expansion of the fuel should the equipment be exposed to a higher ambient temperature.

   In an overfilling situation, additional precautions are necessary to ensure that the situation is handled in a safe manner.

⚠ WARNING

RISK OF INJECTION OR SEVERE INJURY TO PERSONS. KEEP CLEAR OF NOZZLE.

WARNING: High pressure stream of water that this equipment can produce can pierce skin and its underlying tissues, leading to serious injury and possible amputation.

WARNING: High pressure spray can cause paint chips or other particles to become airborne and fly at high speeds.

⚠ WARNING

RISK OF INJURY FROM FALLS WHEN USING LADDER.

WARNING: Be extremely careful when using a ladder, scaffolding or any other relatively unstable location. The cleaning area should have adequate slopes and drainage to reduce the possibility of a fall due to slippery surfaces.

⚠ WARNING

USE PROTECTIVE EYEWEAR AND CLOTHING WHEN OPERATING.

WARNING: High pressure spray can cause paint chips or other particles to become airborne and fly at high speeds. To avoid personal injury, eye safety devices must be worn.

6. Eye safety devices, foot, hand and other protection must be worn when using this equipment.

IMPORTANT SAFETY INSTRUCTIONS

7. High pressure developed by these machines will cause personal injury or equipment damage. Use caution when operating. Do not direct discharge stream at people, or severe injury or death will result.
8. Never make adjustments on machine while it is in operation.
9. Do not operate with spray gun in the off position for extensive periods of time as this may cause damage to the pump.
10. The best insurance against an accident is precaution and knowledge of the machine.
11. Manufacturer will not be liable for any changes made to our standard machines, or any components not purchased from us.
12. Read engine safety instructions provided.

WARNING: Keep water spray away from electric wiring or fatal electric shock may result.

13. Never run pump dry or leave spray gun closed longer than 5 minutes.
14. Do not allow children to operate the pressure washer at any time.
15. Inlet water supply must be cold and clean fresh water.

COMPONENT IDENTIFICATION

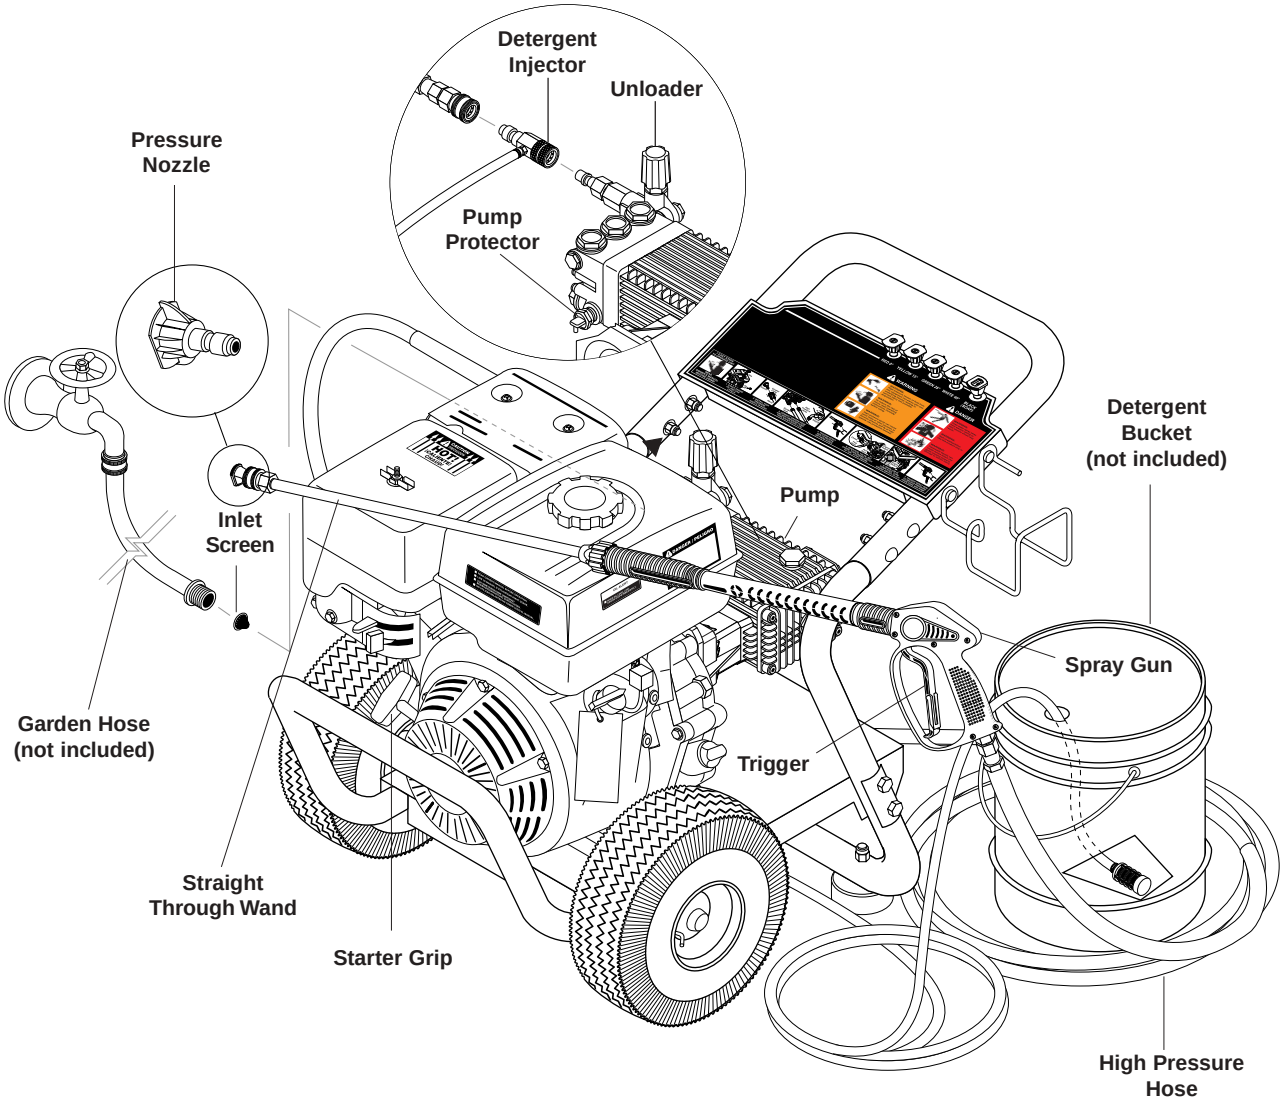

Pump — Develops high pressure.

Starter Grip— Used for starting the engine manually.

Spray Gun — Controls the application of water and detergent onto cleaning surface with trigger device. Includes safety latch.

Detergent Injector — Allows you to siphon and mix detergents.

Wand — Must be connected to the spray gun.

High Pressure Hose — Connect one end to water pump discharge nipple and the other end to spray gun.

Pump Protector — Cycles fresh cool water through pump when recirculating water reaches 140°F.

Note: **If trigger on spray gun is released for more than 2 minutes, water will leak from valve. Warm water will discharge from pump protector onto floor. This system prevents internal pump damage.**

ASSEMBLY INSTRUCTIONS

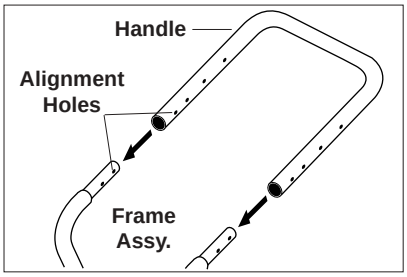

STEP 1: Attach the handle to the frame of the pressure washer. **Note**: It may be necessary to move the handle supports from side to side in order to align the handle so it will slide over the frame supports.

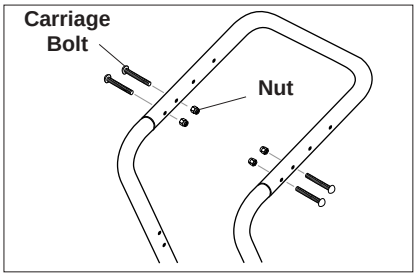

STEP 2: Insert the carriage bolt through the holes from the outside of the unit and attach a nut from the inside of the machine. Tighten nuts.

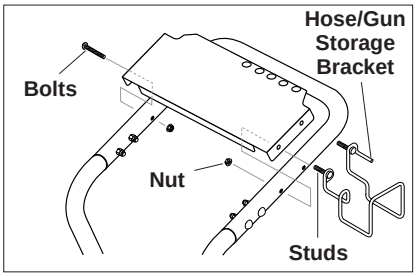

STEP 3: Attach the spray gun/hose storage handle and bracket to handle. Tighten nuts.

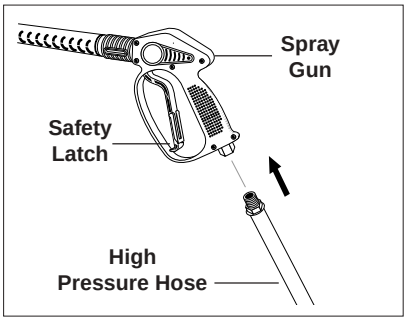

STEP 4: Attach the high pressure hose to the spray gun using teflon tape on hose threads.

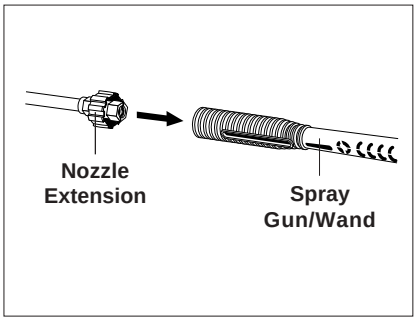

STEP 5: Attach nozzle extension to spray gun/wand. Tighten both by hand.

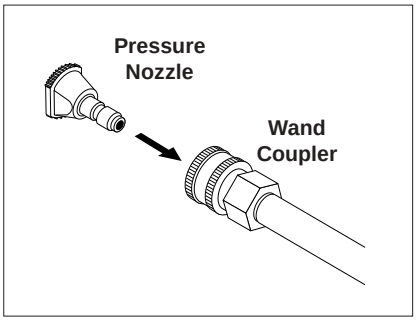

STEP 6: Pull the spring-loaded collar of the wand coupler back to insert your choice of pressure nozzle.

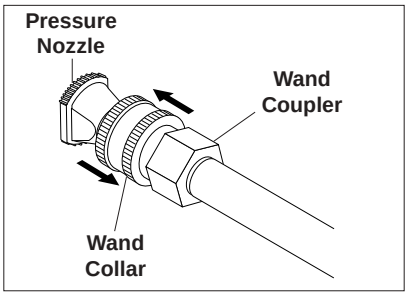

STEP 7: Release the coupler collar and push the nozzle until the collar clicks. Pull the nozzle to make sure it is seated properly.

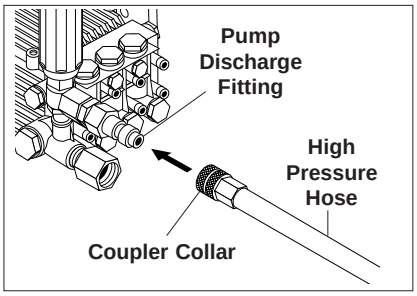

STEP 8: Connect the high pressure hose to the pump discharge fitting. Push coupler collar forward until secure.

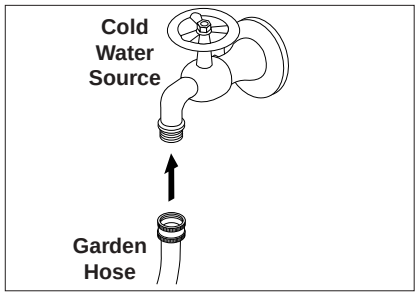

STEP 9: Connect garden hose to the cold water source.

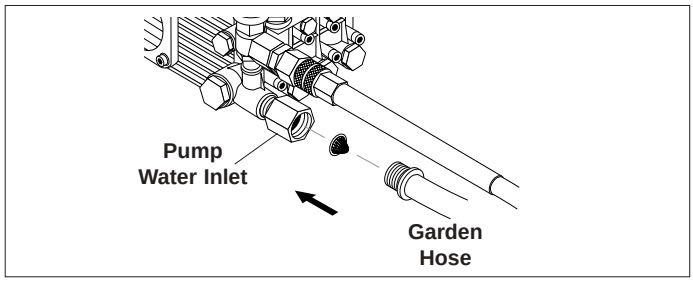

STEP 10: Check inlets filters, remove debris, then connect the garden hose to pump water inlet. ***CAUTION: Do not run the pump without water or pump damage will result.***

OPERATING INSTRUCTIONS

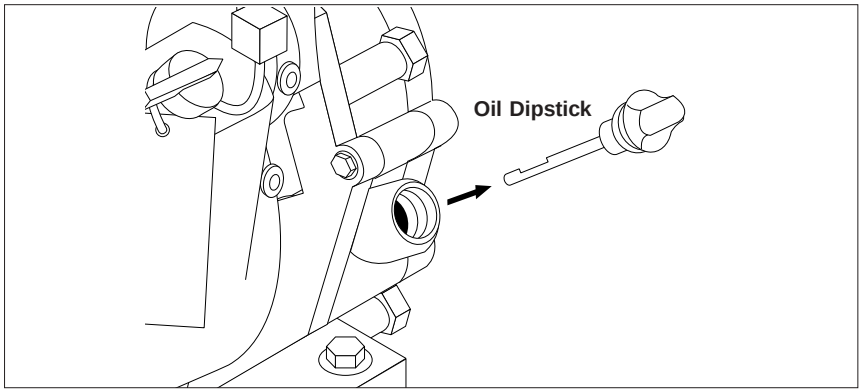

STEP 1: Check engine oil level. Oil level should be level with the bottom of the oil filler neck. Be sure the machine is level when checking the oil level. (Refer to the engine's operating manual included with machine.) We recommend that the oil be changed after the first 5 hours of use, then once every 50 hours. **Note:** Improper oil levels will cause low oil sensor to shut off engine. **IMPORTANT! Do not run engine with high or low oil levels as this will cause engine damage.**

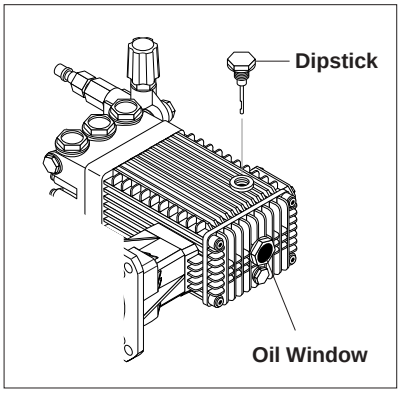

STEP 2: Remove shipping cap and install oil dipstick. Check pump oil level by using dipstick or observe oil level in oil window (if equipped). Use 30 wt. non detergent oil.

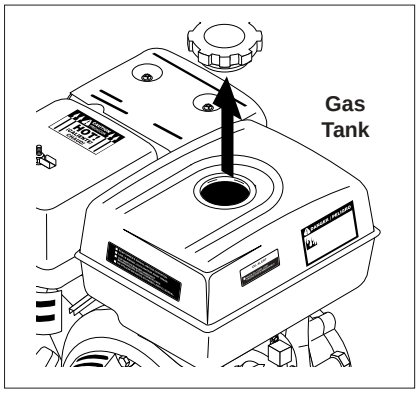

STEP 3: Fill gas tank with unleaded gasoline. Do not use leaded gasoline.

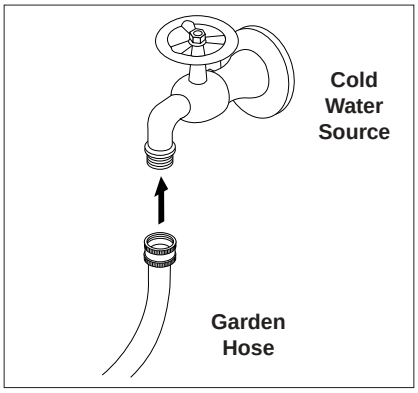

STEP 4: Connect garden hose to the cold water source and turn water on completely. Never use hot water.

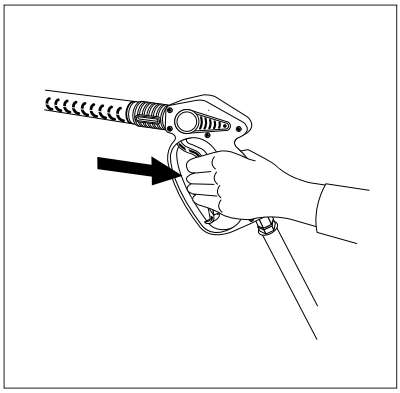

STEP 5: Trigger the spray gun to eliminate trapped air then wait for a steady flow of water to emerge from the spray nozzle.

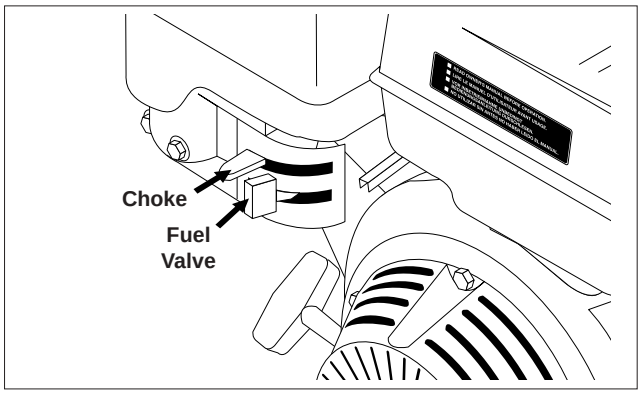

STEP 6: Rotate the fuel shut-off valve to the "On" position. Slide the fuel valve lever to the "ON" position. When the engine is not in use, leave the fuel valve in the "OFF" position.

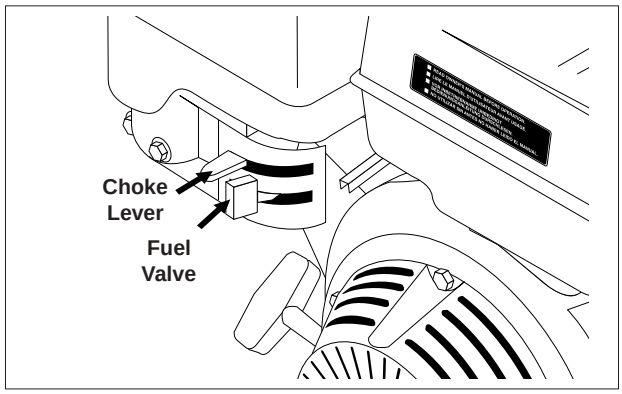

STEP 7: Move the choke lever to the "Choke" position (on a warm engine, leave the choke lever in the run position). Move the choke lever to the "Closed" position. To restart a warm engine, leave the choke lever in the "Open" position.

OPERATING INSTRUCTIONS (CON'T)

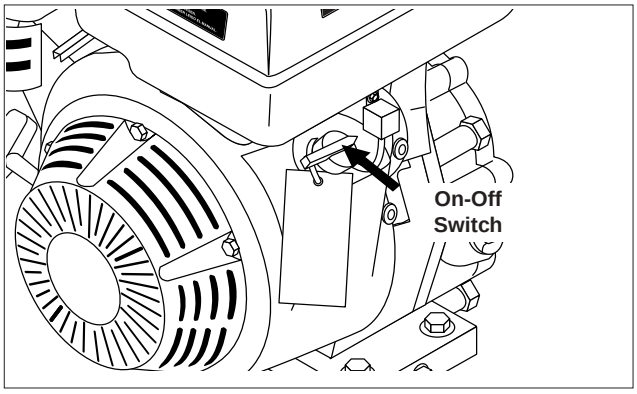

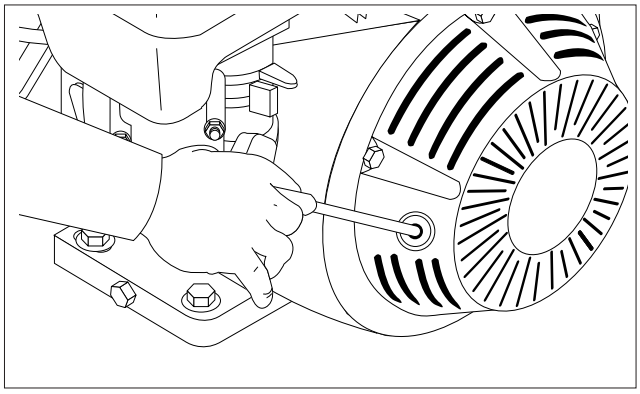

STEP 8: Turn the engine switch to "On" position.

On Briggs engines, move the throttle lever to "Fast" position, shown on the engine as a rabbit.

STEP 9: Pull the starter grip. If the engine fails to start after 2 pulls, squeeze the trigger gun to release pressure and repeat step. Return starter gently. After the engine warms up enough to run smoothly, move choke to run position and throttle to fast position.

CAUTION: Small engines may kick back. Do not hold pull starter grip tightly in hand.

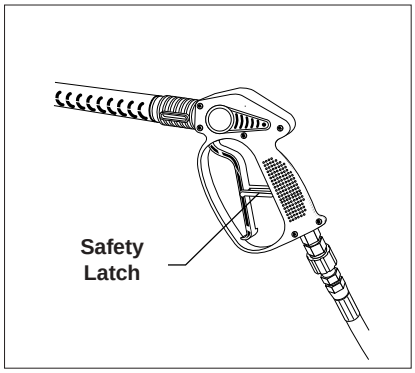

⚠ WARNING! Never replace nozzles without engaging the safety latch on the spray gun trigger.

NOZZLES

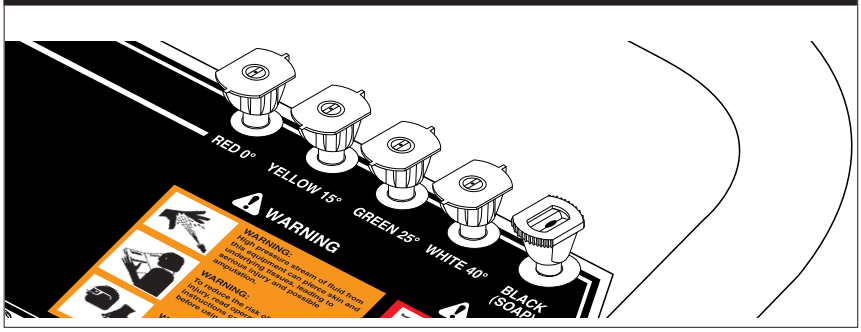

The five color-coded quick connect nozzles provide a wide array of spray widths from 0° to 45° and are easily accessible when placed in the convenient rubber nozzle holder, which is provided on the front of the machine.

NOTE: For a more gentle rinse, select the white 40° or green 25° nozzle. To scour the surface, select the yellow 15° or red 0° nozzle. To apply detergent select the black nozzle.

DETERGENT AND GENERAL CLEANING TECHNIQUES

WARNING: Some detergents may be harmful if inhaled or ingested, causing severe nausea, fainting or poisoning. The harmful elements may cause property damage or severe injury.

STEP 1: Connect detegent injector to discharge nipple on machine. Connect high pressure hose to injector with quick coupler. (Check to make sure locking coupler sleeves are in proper position before applying water pressure).

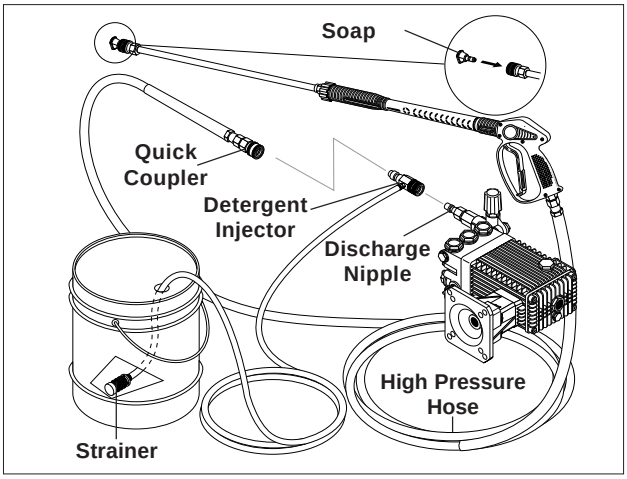



STEP 2: Use detergent designed specifically for pressure washers. Household detergents could damage the pump. Prepare detergent solution as required by the manufacturer. Fill a container with pressure washer detergent. Place the filter end of detergent suction tube into the detergent container.



STEP 3: With safety latch on spray gun engaged, secure black detergent nozzle into quick coupler. **NOTE:** Detergent cannot be applied using red, yellow, green or white nozzles.

STEP 4: With the engine running, pull trigger to operate machine. Liquid detergent is drawn into the machine and mixed with water. Apply detergent to work area. Do not allow detergent to dry on surface.

IMPORTANT: You must flush the detergent injection system after each use by placing the suction tubeinto a bucket of clean water, then run the pressure washer in low pressure for 1-2 minutes.

THERMAL PUMP PROTECTION

If you run the engine on your pressure washer for 3-5 minutes without pressing the trigger on the spray gun, circulating water in the pump can reach high temperatures. When the water reaches this temperature, the pump protector engages and cools the pump by discharging the warm water onto the ground. This thermal device prevents internal damage to the pump.

CLEANING TIPS

Pre-rinse cleaning surface with fresh water. Place detergent suction tube directly into cleaning solution and apply to surface at low pressure (for best results, limit your work area to sections approximately 6 feet square and always apply detergent from bottom to top). Allow detergent to remain on surface 1-3 minutes. Do not allow detergent to dry on surface. If surface appears to be drying, simply wet down surface with fresh water. If needed, use brush to remove stubborn dirt. Rinse at high pressure from top to bottom in an even sweeping motion keeping the spray nozzle approximately 1 foot from cleaning surface. Use overlapping strokes as you clean and rinse any surface. For best surface cleaning action spray at a slight angle.

Recommendations:

- Before cleaning any surface, an inconspicuous area should be cleaned to test spray pattern and distance for maximum cleaning results.
- If painted surfaces are peeling or chipping, use extreme caution as pressure washer may remove the loose paint from the surface.
- Keep the spray nozzle a safe distance from the surface you plan to clean. High pressure wash a small area, then check the surface for damage. If no damage is found, continue to pressure washing.

CAUTION - Never use:

- Bleach, chlorine products and other corrosive chemicals
- Liquids containing solvents (i.e., paint thinners, gasoline, oils)
- Tri-sodium phosphate products
- Ammonia products
- Acid-based products

These chemicals will harm the machine and will damage the surface being cleaned.

RINSING

It will take a few seconds for the detergent to clear. Apply safety latch to spray gun. Remove black soap nozzle from the quick coupler. Select and install the desired high pressure nozzle. **NOTE:** You can also stop detergent from flowing by simply removing detergent siphon tube from bottle.

SHUTTING DOWN AND CLEAN-UP

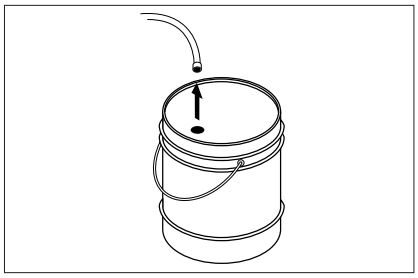

STEP 1: Remove detergent suction tube from container and insert into one gallon of fresh water. Slide nozzle forward for low pressure or to connect black detergent nozzle. Pull trigger on spray gun and siphon water for one minute.

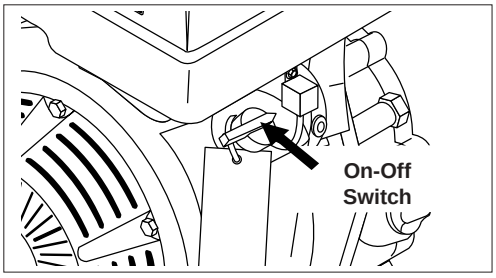

STEP 2: Turn off the engine.



STEP 3: Turn off water supply.



STEP 4: Press trigger to release water pressure.

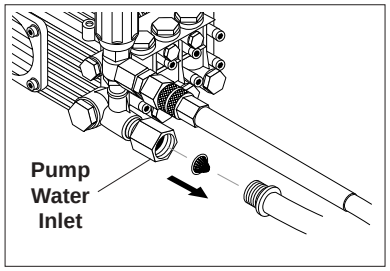

STEP 5: Disconnect the garden hose from the water inlet on the machine.

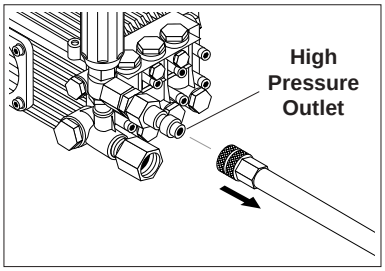

STEP 6: Disconnect the high pressure hose from high pressure outlet.



STEP 7: Engage the spray gun safety lock.

STORAGE

CAUTION: Always store your pressure washer in a location where the temperature will not fall below 32°F (0°C). The pump in this machine is susceptible to permanent damage if frozen. FREEZE DAMAGE IS NOT COVERED BY WARRANTY.

1. Stop the pressure washer, squeeze spray gun trigger to release pressure.
2. Detach water supply hose and high pressure hose.
3. Turn on the machine for a few seconds, until remaining water exits. Turn engine off immediately.
4. Drain the gas and oil from the engine.
5. Do not allow high pressure hose to become kinked.
6. Store the machine and accessories in a room which does not reach freezing temperatures.

CAUTION: Failure to follow the above directions will result in damage to your pressure washer.

When the pressure washer is not being operated or is being stored for more than one month, follow these instructions:

1. Replenish engine oil to upper level.
2. Drain gasoline from fuel tank, fuel line, fuel valve and carburetor.
3. Pour about one teaspoon of engine oil through the spark plug hole, pull the starter grip several times and replace the plug. Then pull the starter grip slowly until you feel increased pressure which indicates the piston is on its compression stroke and leave it in that position. This closes both the intake and exhaust valves to prevent rusting of cylinder.
4. Cover the pressure washer and store in a clean, dry place that is well ventilated away from open flame or sparks. **NOTE:** The use of a fuel additive, such as STA-BIL®, or an equivalent, will minimize the formulation of fuel deposits during shortage. Such additives may be added to the gasoline in the fuel tank of the engine, or to the gasolinee in a storage container.

After Extended Storage

CAUTION: Prior to restarting, thaw out any possible ice from pressure washer hoses, spray gun or wand.

Engine Maintenance

During the winter months, rare atmosheric conditions may develop which will cause an icing condition in the carburetor. If this develops, the engine may run rough, lose power and may stall. This temporary condition can be overcome by deflecting some of the hot air from the engine over the carburetor area. **NOTE:** Refer to the engine manufacturer's manual for service and maintenance of the engine.

TROUBLESHOOTING

PROBLEM	POSSIBLE CAUSE	SOLUTION
LOW OPERATING PRESSURE	Insufficient water supply. Closed faucet. Inlet hose kinked	Use larger garden hose; clean inlet water screen. Open faucet.
	Clogged inlet hose strainer	Check plumbing system for leaks. Retape leaks with teflon tape.
	Faulty or misadjusted unloader valve	Adjust unloader for proper pressure. Install repair kit when needed. Call technical support.
	Worn packing in pump	Call technical support.
	Machine has been stored in freezing temperatures	Thaw out machine completely, including hose, spray gun and wand.
	Slow engine RPM	Call technical support.
FLUCTUATING PRESSURE	Worn or dirty pump valves	Call technical support.
	Nozzle is obstructed	Use nozzle wire in accessory kit.
	Pump sucking air, inlet hose leaking	Check all pump lines and connections.
PRESSURE LOW AFTER PERIOD OF NORMAL USE	Nozzle worn	Replace nozzle.
	Unloader valve worn	Replace unloader valve.
ENGINE WILL NOT START OR STOPS WHILE OPERATING	Low oil shutdown	Fill engine with oil.
	Out of gas	Fill fuel tank.
	Water in gasoline	Drain gas tank; fill with clean fuel.
ENGINE IS OVERLOADED	Nozzle partially blocked	Clean nozzle.
	Excessive pressure from high engine RPM	Adjust engine throttle to lower RPM.
WATER OR OIL LEAKING FROM BOTTOM OF PUMP	A small amount of leaking is normal	If excessive leaking occurs, call technical support.
PRESENCE OF WATER IN PUMP OIL	Water sprayed at machine	Change oil. Direct spray away from machine.
	High humidity in air	Check and change oil twice as often.
	Piston packing worn. Oil seal worn.	Call technical support.

TROUBLESHOOTING

PROBLEM	POSSIBLE CAUSE	SOLUTION
ENGINE OPERATES FOR 15 MIN. THEN STOPS	Not enough gas or engine oil	Fill tank with gas. Check oil level.
	Vapor lock developed by heat of day	Keep gas tank full to avoid vapor locking.
	Obstruction in fuel filter	Clean or replace fuel filter.
ENGINE LACKS POWER	Dirty air filter	Replace air filter.
ENGINE FALTERS	Choke is opened too soon	Move choke to halfway position until engine runs smoothly.
WATER DRIPPING FROM UNDER PUMP	Piston packing worn	Call technical support.
	O-Ring plunger retainer worn	Call technical support.
	Cracked piston	Call technical support.
OIL DRIPPING	Oil seal worn or damaged	Call technical support.
WATER LEAKING FROM PUMP PROTECTOR	Spray gun closed with machine running 5 minutes or longer	Open spray gun or turn off machine.
	Excess water supply pressure	Place a pressure regulator at end of 50' garden hose.
NO DETERGENT	Detergent suction tube not properly connected to machine	Check connection.
	Detergent is too thick	Dilute detergent. For best results, use manufacturers detergent.
	Detergent filter valve is at lowest setting	Set detergent filter valve to a higher setting.
	Filter on detergent suction tube is clogged	Run warm water through filter to remove debris.
	Damaged or clogged detergent suction tube	Remove obstruction or replace detergent suction tube.
	A high pressure nozzle is attached.	Replace with black detergent nozzle.
	Discharge nozzle is obstructed	Blow out or remove debris with fine needle.
GARDEN HOSE CONNECTION LEAKS	Loose fittings	Tighten fittings.
	Missing/worn rubber washer	Insert new washer.
SPRAY WAND LEAKS	Spray wand not properly attached	Slide the spray wand into the gun. Turn the wand collar clockwise onto the spray gun threads until tight.
	Broken o-ring	Call customer service and order an o-ring.
PUMP IS NOISY	Pump is sucking air	Check that hoses and fittings are air tight. Turn off machine and purge pump by squeezing trigger gun until a steady flow of water emerges through nozzle.

PREVENTATIVE MAINTENANCE

This pressure washer was produced with the best available materials and quality craftsmanship. However, you as the owner have certain responsibilities for the correct care of the equipment. Attention to regular preventative maintenance procedures will assist in preserving the performance of your equipment. Contact your dealer for maintenance. Regular preventative maintenance will add many hours to the life of your pressure washer. Perform maintenance more often under severe conditions.

MAINTENANCE SCHEDULE		
Engine Oil	Inspect	Daily
	Change	First month or 20 hours. Every 100 hours or every 6 months after first month
	Filter	Every 50 hours
Air Cleaner/Filter	Inspect	Every 50 hours
	Clean	Monthly
Engine Fuel Filter		500 hours or 6 months
Spark Plug Maintenance		300 hours or annually
Clean Fuel Tank(s)		Annually
Replace Fuel Lines		Annually
Pump Oil	Inspect	Oil level daily
	Change	After first 50 hours, then every 500 hours or annually
Replace High Pressure Nozzle		Every 6 months
Replace Quick Connects/O-Rings		Annually/As needed
Clean Water Screen/Filter		Weekly
Replace HP Hose		Annually (if there are any signs of wear)

OIL CHANGE RECORD

Check pump oil and engine oil level before first use of your new pressure washer.

Date Oil Changed Month/Day/Year	Estimated Operating Hours Since Last Oil Change

Date Oil Changed Month/Day/Year	Estimated Operating Hours Since Last Oil Change

EXPLODED VIEW

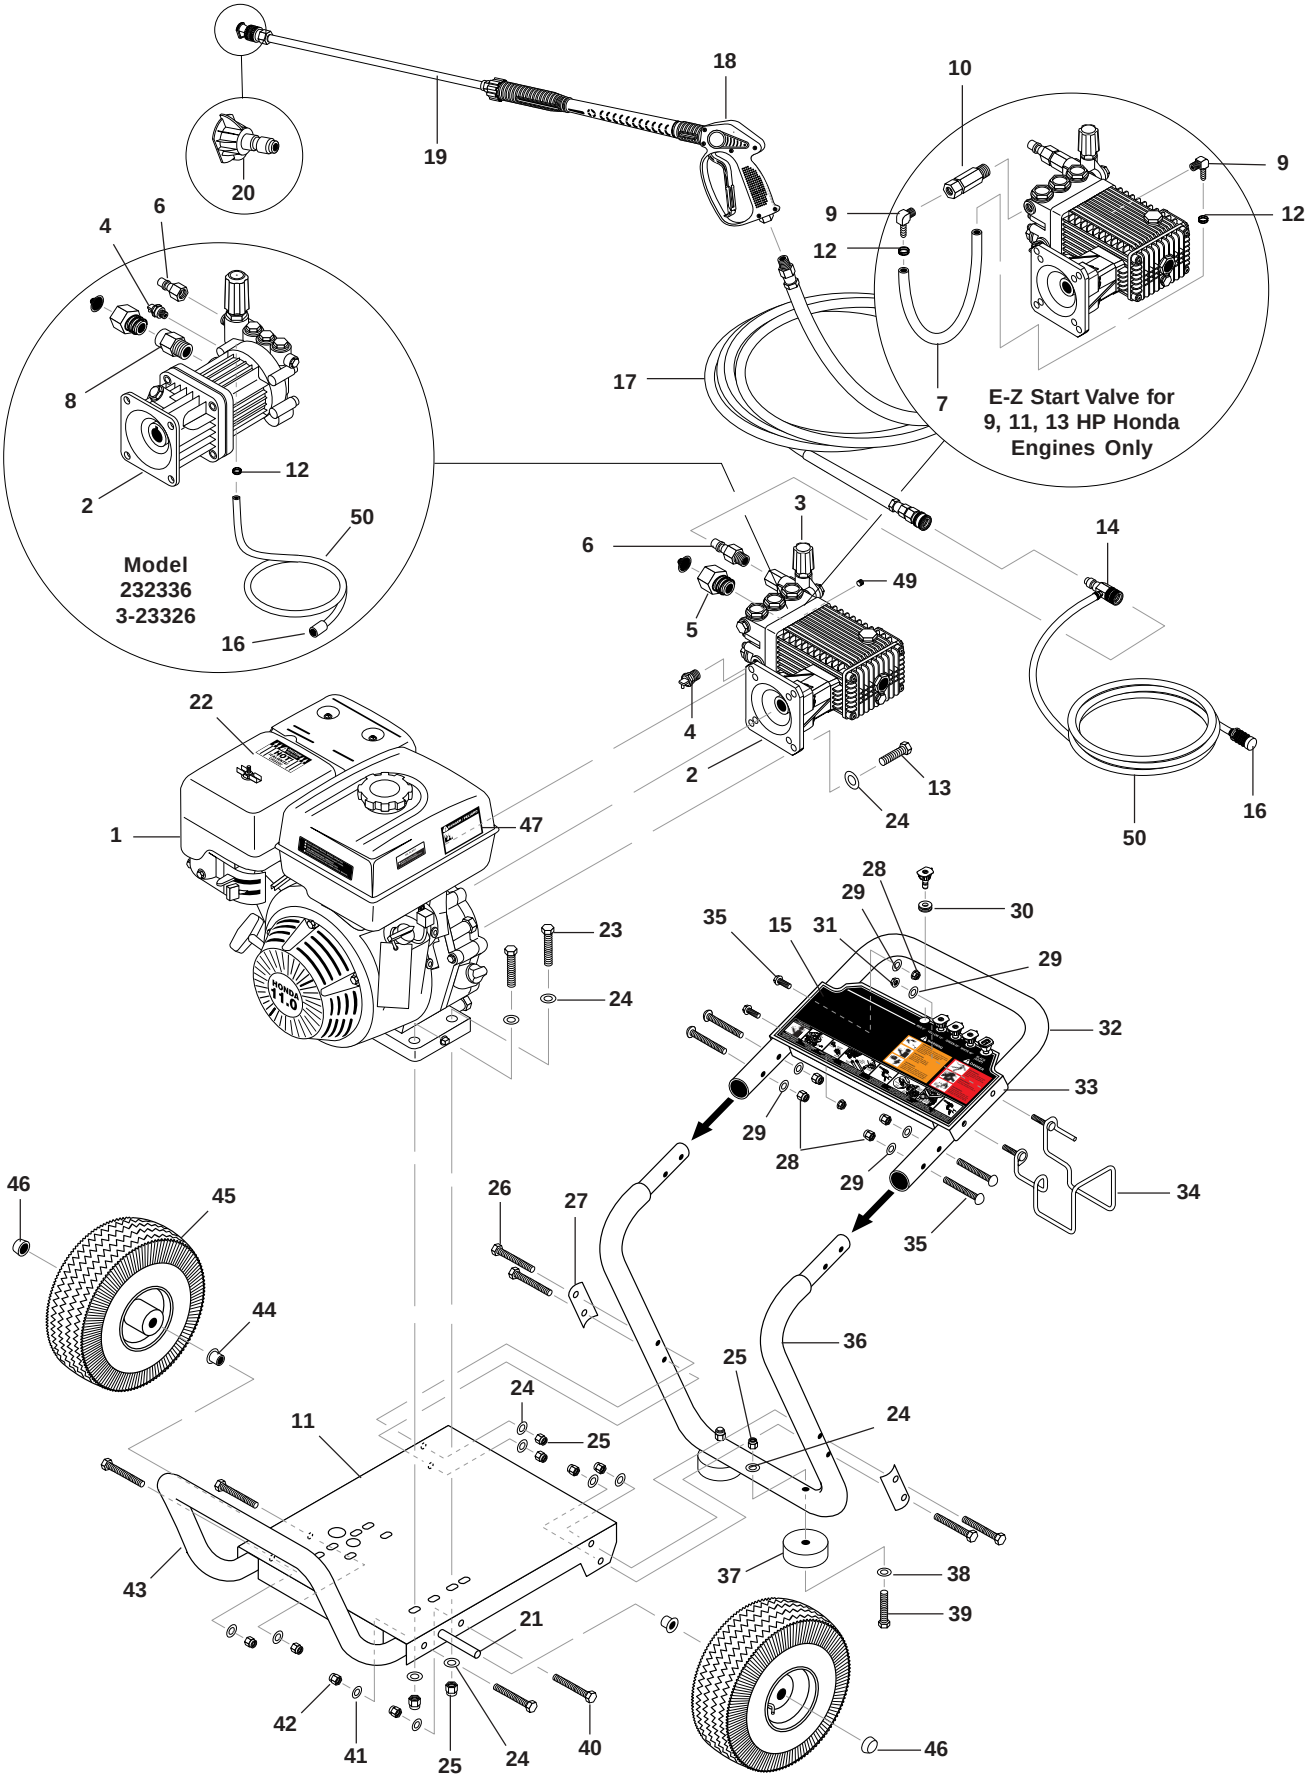

EXPLODED VIEW PARTS LIST

ITEM	PART NO.	DESCRIPTION	QTY
1	Engine, See Specifications Page 19		
2	Pump, See Specifications Page 19		
3	Unloader, See Specifications Page 19		
4	2-300816	Pump Protector, 3/8" PTP (232336, 232439, 252739, 3-23326, 3-27321, 3-24321)	1
	2-30082	Pump Protector, 1/2" PTP (303039, 353239, 383539, 3-30324, 4-32324, 4-35324, 303037, 232437, 252737, 353237, 383537)	1
5	2-10942	Swivel, 1/2" MP x 3/4" GHF (232437, 252737, 303037, 303039, 3-30324, 353237, 353239, 383537, 383539, 4-32324, 4-35324)	1
	2-10943	Swivel, 3/8" MP x 3/4" GHF (232439, 252739, 3-24321, 3-27321)	1
6	2-2006	Nipple, 3/8" x 3/8" NPT ST Fem (232439, 252739, 232336, 232437, 252737, 3-23326, 3-24321, 3-27321)	1
	2-2007	Nipple, 3/8" x 3/8" MPT Male (303039, 353239, 3-30324, 4-32324, 4-35324, 303037, 353237, 383537, 383539)	1
7	4-02100000	Hose, 1/4" Push-on (E-Z-Start, 9 HP, 11 HP, 13 HP Honda)	14 in
8	2-1100	Adapter, 1/2" x 1/2" Pipe (232336, 3-23326)	1
9	2-1088	Hose, Barb, 1/4" Barb x 1/8" MP, 90° (E-Z Start, 9 HP, 11 HP, 13 HP Honda)	2
10	2-3100544	Valve, E-Z Start 3/8" MPT x 1/8" FPT (9 HP, 11 HP, 13 HP Honda)	1
11	95-07104965	Base, CW Direct, Black (PC Models)	1
	95-07104927	Base, CW Direct, Red (DB, DC, DG Models)	1
12	2-9040	Clamp, Hose, (E-Z Start, 9 HP, 11 HP , 13 HP Honda)	2
		(232336, 3-23326)	1
13	90-10074	Bolt, 5/16-24" x 1" NF, HH (5 HP, 5.5 HP, 6.5 HP)	4
	90-1017	Bolt, 3/8" x 1-1/4" NC, HH (9 HP, 11 HP, 13 HP)	4
14	4-011184	Injector, Detergent (All Models Except 232336, 3-23326)	1
15	10-08020	Label, Instructions, PC Models	1
	11-0359	Label, Instructions, DB Models	1
	11-0360	Label, Instructions, DC Models	1
	11-0358	Label, Instructions, DG Models	1
16	2-1904	Strainer, Plastic, 1/4" Hose Barb	1

ITEM	PART NO.	DESCRIPTION	QTY
17	Hose, High Pressure, See Specifications Page 19		
18	4-011137	Spray Gun, SK2, 3/8" Inlet, Lance W/M22CPLR	1
19	4-011106	Wand, 18" M22 x 1/4" QC	1
20	Nozzle Size, See Page 19 For Proper Size		
	4-12803000	Nozzle, 3.0 0° Red	1
	4-12803015	Nozzle, 3.0 15° Yellow	1
	4-12803025	Nozzle, 3.0 25° Green	1
	4-12803040	Nozzle, 3.0 40° White	1
	4-12803500	Nozzle, 3.5 0° Red	1
	4-12803515	Nozzle, 3.5 15° Yellow	1
	4-12803525	Nozzle, 3.5 25° Green	1
	4-12803540	Nozzle, 3.5 40° White	1
	4-12804000	Nozzle, 4.0 0° Red	1
	4-12804015	Nozzle, 4.0 15° Yellow	1
	4-12804025	Nozzle, 4.0 25° Green	1
	4-12804040	Nozzle, 4.0 40° White	1
	4-16540	Nozzle, Compl, QCEM-6540, Brass (All Models)	1
21	95-07102313	Axle, 5/8" x 19.625" Long	1
22	10-02025A	Label, HOT	1
23	90-1009	Bolt, 5/16" x 1-1/2", NC HH (5 HP, 5.5 HP, 6.5 HP)	4
	90-1019	Bolt, 3/8" x 1-3/4" Tap (9 HP, 11 HP, 13 HP)	4
24	90-4001	Washer, 5/16" Flat, SAE (5 HP, 5.5 HP, 6.5 HP)	14
	90-4002	Washer, 3/8" SAE, Flat (9 HP, 11 HP, 13 HP)	18
		(5 HP, 5.5 HP, 6.5 HP)	6
25	90-2001	Nut, 5/16" ESNA, NC (5 HP, 5.5 HP, 6.5 HP)	4
	90-2002	Nut, 3/8" ESNA, NC (9 HP, 11 HP, 13 HP)	10
		(5 HP, 5.5 HP, 6.5 HP)	6
26	90-1020	Bolt, 3/8" x 2" NC, HH	4
27	95-07104924	Retainer Bracket, Handle, Black (PC Models)	2
	95-07104923	Retainer Bracket, Handle, Red (DB, DC, DG Models)	2
28	90-2000	Nut, 1/4" ESNA, NC	6
29	90-4000	Washer, 1/4" Flat	6
30	2-0103	Grommet, Rubber, Nozzle Holder,	5
31	90-20012	Nut, 5/16" Flange, Whiz Loc	4
32	95-07104961	Handle, Grab, Chrome (PC Models)	1
	95-07104921	Handle, Grab, Red (DB, DC, DG Models)	1
33	95-07104966	Plate, Warning, Black (PC Models)	1
	95-07104945	Plate, Warning, Red (DB, DC, DG Models)	1

EXPLODED VIEW PARTS LIST CONT.

ITEM	PART NO.	DESCRIPTION	QTY
34	95-07102382	Hanger, Hose/Wand	1
35	90-100473	Bolt, 1/4"-20 x 1-3/4", Carriage, Zinc	6
36	95-07104950	Handle, Lower Grab, Chrome (PC Models)	1
	95-07104920	Handle, Lower Grab, Red (DB, DC, DG Models)	1
37	2-01041	Pad, Soft Rubber	2
38	90-40125	Washer, 3/8" x 1" Steel	2
39	90-10201	Bolt, 3/8" x 2-1/4" HH, Grd. 5	2
40	90-10077	Bolt, Carriage, 5/16" x 1-3/4"	4
41	90-4001	Washer, 5/16" Flat	4
42	90-2001	Nut, 5/16" ESNA, NC	4
43	95-07104962	Handle, Bumper, Chrome (PC Models)	1
	95-07104922	Handle, Bumper, Red (DB, DC, DG Models)	1
44	2-01403	Bushing, 5/8" Snap	2
45	4-0303	Wheel & Tire Assy, 4" Steel Rim w/Tube	2
46	90-200422	Cap, 5/8" Axle Hub, Black	2
47	10-02029	Label, Cool Engine Before Filling	1
48	90-4000	Washer, 1/4 Flat	4
49	2-1044	Plug, 1/8" Countersunk (3-24321, 3-27321)	1
	2-1046	Plug, 1/4" Countersunk (232437, 252737)	1
50	4-02080000	Tube, 1/4" x 1/2" Clear Vinyl	6 ft.

VERTICAL EXPLODED VIEW

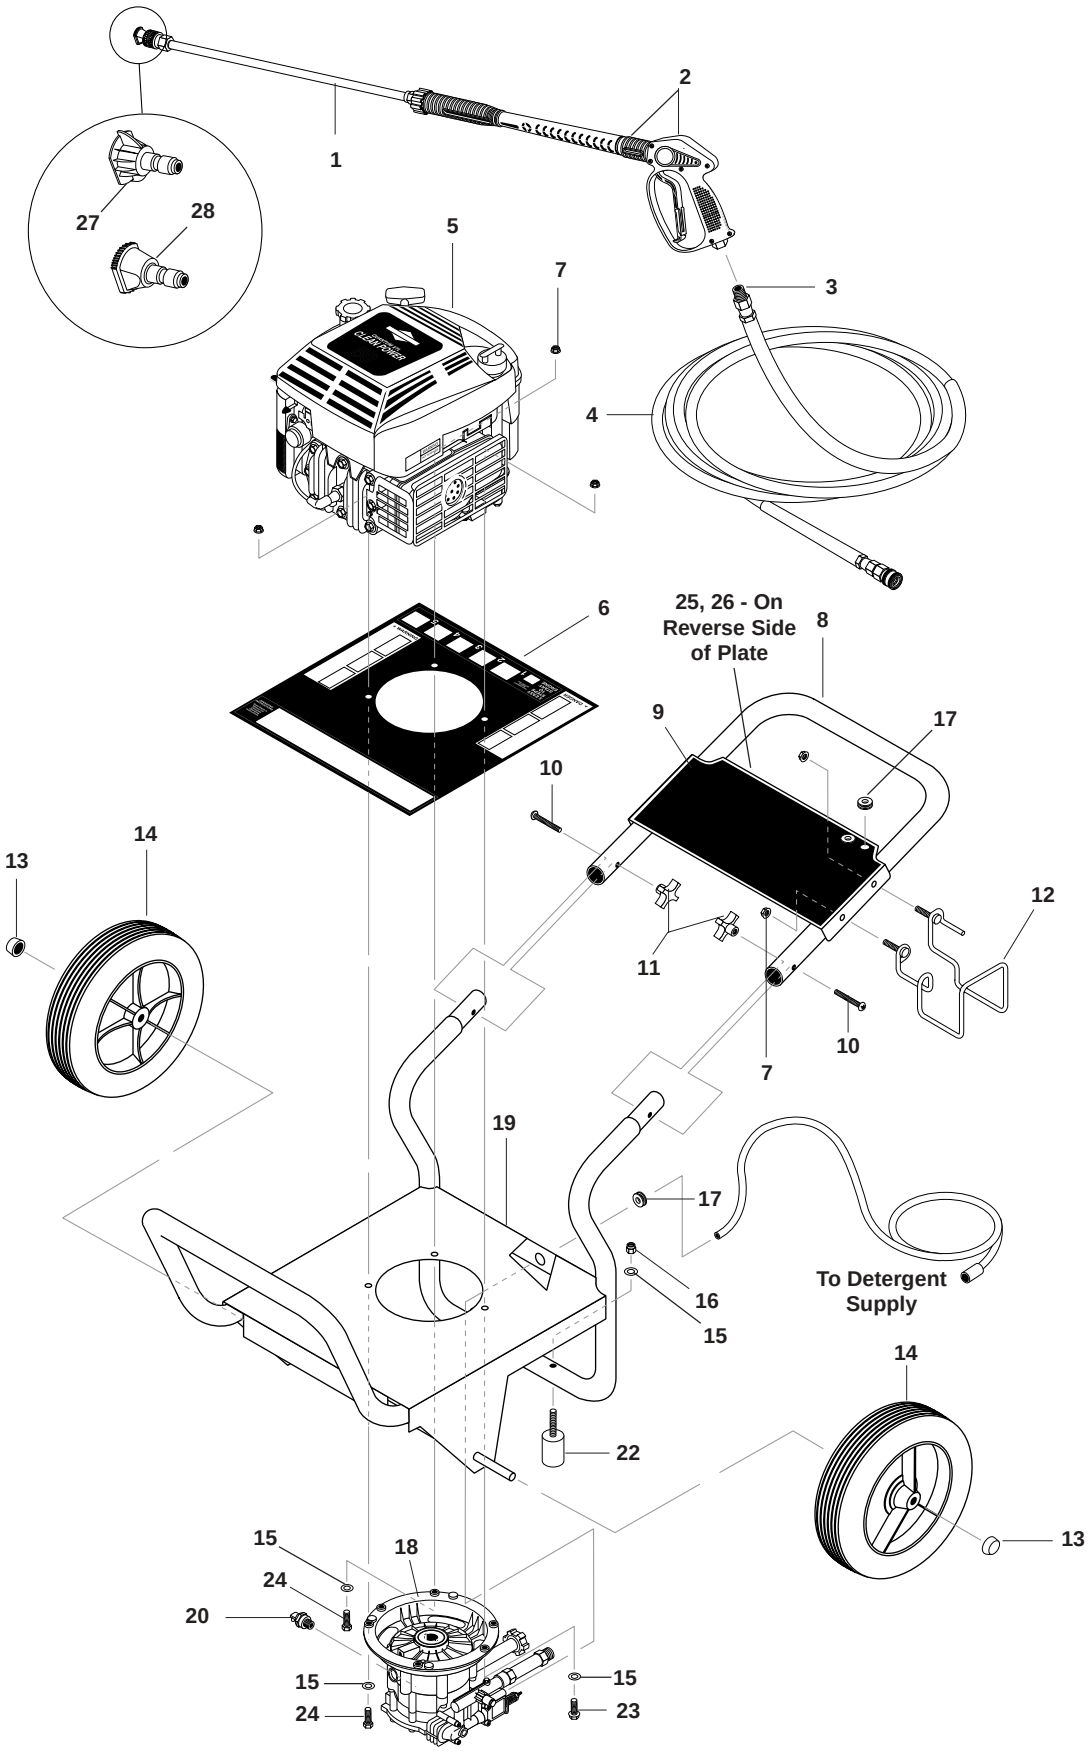

VERTICAL EXPLODED VIEW PARTS LIST

ITEM	PART NO.	DESCRIPTION	QTY
1	4-011106	Wand, 18" M22 x 1/4" QC	1
2	4-011137	Spray Gun, SK2, 3/8" Inlet, Lance W/M22 CPLR	1
3	2-2115	Nipple, 3/8" MPT x M22, Twist Coupler	1
4	4-02010025M	Hose, 1/4" x 25", Thermo Plastic, 22mm Ends	1
5	5-0323	Engine, Briggs, 6HP Quantum Vertical	1
6	11-0335	Label, Warning/Instructions	1
7	90-20012	Nut, Whiz Loc 5/16" Flange	5
8	95-07102380	Handle Assy, C-Series	1
9	11-0366	Label, Handle (DB Model)	1
	11-0365	Label, Handle (DG Model)	1
	11-0367	Label, Handle (DC Model)	1
	11-0368	Label, Handle (PC Model)	1
10	90-100471	Bolt, Carriage, Zinc 1/4" - 20 x 1-1/2"	2
11	90-500471	Knob, Plastic, 3-Prong 1-1/8" Dia, 1/4"-20 Blind Insert	2
12	95-07102382	Assy, Holder, Wand/Hose C-Series	1
13	90-200423	Cap, 1/2" Axle Hub, Red	2
14	4-03050	Wheel, 10" x 1.72-5", Pneumatic White Plastic	2
15	90-4001	Washer, 5/16" Flat	5
16	90-2001	Nut, 5/16" ESNA	2
17	2-0103	Grommet, Rubber	3
18	5-1100	Pump, Faip MTPV2300-2 2.1 @ 2300, 7/8" Hollow Shaft	1
19	95-07102383	Base Assy, Consumer Model Vertical Shaft	1
20	2-300812	Pump Protector, 1/4" 145°	1
21	95-07141119	▲ Key, 0.185 Sqr x 1.00"	1
22	2-010151	Bumper, Rubber, 1" w/Bolt	2
23	90-10127	Bolt, Whiz Lock, 5/16" x 2-3/4"	1
24	90-1010	Bolt, 5/16" x 1-3/4"	2
25	10-9999	Clear Lexan	1
26	10-08017	Intended For Outdoor Use, Label	1
27	4-12802715	Nozzle, 2.7, 15° Yellow	1
28	4-16540	Nozzle, QCEM 6540 Brass	1

▲ Not Shown

SPECIFICATIONS

Machine		Pressure	Nozzle		Pump	Unloader	Engine	Engine
Model	GPM	(PSI)	Size	Hose p/n	Part #	Part #	Hp	Part #
DB-232336	2.3	2300	3.0	4-0203030C	5-2102	n/a	5	5-0101
DB-232439	2.3	2400	3.0	4-0203050C	5-1863	5-3305	5.5	5-0104
DB-252739	2.5	2700	3.0	4-0203050C	5-1863	5-3305	6.5	5-01041
DB-303039	3.0	3000	3.5	4-0203050C	5-1260	5-3029	9	5-0102
DB-353239	3.5	3200	4.0	4-0204050C	5-1261	5-3029	11	5-0105
DB-383539	3.8	3500	4.0	4-0204050C	5-1262	5-3029	13	5-010721
DB-212328	2.1	2000	2.7	4-02010025M	5-1100	n/a	6	5-0323
PC2-23228	2.1	2000	2.7	4-02010025M	5-1100	n/a	6	5-0323
PC3-23326	2.3	2300	3.0	4-0203030C	5-2102	n/a	5	5-0101
PC3-24321	2.3	2400	3.0	4-0203050C	5-23127	5-3025	5.5	5-0104
PC3-27321	2.5	2700	3.0	4-0203050C	5-23027	5-3024	6.5	5-01041
PC3-30324	3.0	3000	3.5	4-0203050C	5-1760	5-3029	9	5-0102
PC4-32324	3.5	3200	4.0	4-0204050C	5-1761	5-3029	11	5-0105
PC4-35324	3.8	3500	4.0	4-0204050C	5-1762	5-3029	13	5-010721
DC-232336	2.3	2300	3.0	4-0203030C	5-2102	n/a	5	5-0101
DC-232437	2.3	2400	3.0	4-0203050C	5-1630	5-3151	5.5	5-0104
DC-252737	2.5	2700	3.0	4-0203050C	5-1630	5-3151	6.5	5-01041
DC-303037	3.0	3000	3.5	4-0203050C	5-1960	5-3029	9	5-0102
DC-353237	3.5	3200	4.0	4-0204050C	5-1961	5-3029	11	5-0105
DC-383537	3.8	3500	4.0	4-0204050C	5-1962	5-3029	13	5-010721
DC-212328	2.1	2000	2.7	4-02010025M	5-1100	n/a	6	5-0323
DG-232336	2.3	2300	3.0	4-02093450BC	5-2102	n/a	5	5-0101
DG-232437	2.3	2400	3.0	4-02093450BC	5-1630	5-3151	5.5	5-0104
DG-252737	2.5	2700	3.0	4-02093450BC	5-1630	5-3151	6.5	5-01041
DG-303037	3.0	3000	3.5	4-02093450BC	5-1960	5-3029	9	5-0102
DG-353237	3.5	3200	4.0	4-02073450RC	5-1961	5-3029	11	5-0105
DG-383537	3.8	3500	4.0	4-02073450RC	5-1962	5-3029	13	5-010721
DG-212328	2.1	2000	2.7	4-02010025M	5-1100	n/a	6	5-0323

SHARK LIMITED NEW PRODUCT WARRANTY
PRESSURE WASHERS

WHAT THIS WARRANTY COVERS

All SHARK PRESSURE WASHERS are warranted by SHARK to the original purchaser to be free from defects in materials and workmanship under normal use, for the periods specified below. This Limited Warranty is subject to the exclusions shown below, is calculated from the date of the original purchase, and applies to the original components only. Any parts replaced under this warranty will assume the remainder of the part's warranty period. This warranty applies to the original purchaser and is not transferable.

LIMITED LIFETIME PARTS WARRANTY:

Components manufactured by SHARK, such as frames, handles, and belt guards. Forged brass pump manifold. All heating coils will have a three year warranty. Internal components (excluding oil seals) on the oil-end of all pressure washer pumps will have a seven year warranty.

ONE YEAR PARTS WARRANTY:

All other components, excluding normal wear items as described below, will be warranted for one year on parts. Warranty on these parts will be for one year regardless of the duration of the original component manufacturer's part warranty.

WARRANTY PROVIDED BY OTHER MANUFACTURERS:

Motors, generators, and engines, which are warranted by their respective manufacturers, are serviced through these manufacturers' local authorized service centers. SHARK cannot provide warranty on these items.

WHAT THIS WARRANTY DOES NOT COVER

This warranty does not cover the following items:

1. Normal wear items, such as nozzles, guns, discharge hoses, wands, quick couplers, seals, filters, gaskets, O-rings, packings, pistons, pump valve assemblies, strainers, belts, brushes, rupture disks, fuses, pump protectors.
2. Damage or malfunctions resulting from accidents, abuse, modifications, alterations, incorrect installation, improper servicing, failure to follow manufacturer's maintenance instructions, or use of the equipment beyond its stated usage specifications as contained in the operator's manual.
3. Damage due to freezing, chemical deterioration, scale buildup, rust, corrosion, or thermal expansion.
4. Damage to components from fluctuations in electrical or water supply.
5. Normal maintenance service, including adjustments, fuel system cleaning, and clearing of obstructions.
6. Transportation to service center, shop labor charges, field labor charges, or freight damage.

WHAT YOU MUST DO TO OBTAIN WARRANTY SERVICE

While not required for warranty service, we request that you register your SHARK pressure washer by returning the completed registration card. In order to obtain warranty service on items, you must return the product to an Authorized SHARK Dealer, freight prepaid, with proof of purchase, within the applicable warranty period. If the product is permanently installed, you must notify your Authorized SHARK Dealer of the defect. The Authorized Dealer will file a claim, which must subsequently verify the defect. In most cases, the part must be returned to SHARK freight prepaid with the claim. For warranty service on components warranted by other manufacturers, the Authorized Dealer can help you obtain warranty service through these manufacturers' local authorized service centers.

LIMITATION OF LIABILITY

SHARK'S liability for special, incidental, or consequential damages is expressly disclaimed. In no event shall SHARK'S liability exceed the purchase price of the product in question. SHARK makes every effort to ensure that all illustrations and specifications are correct, however, these do not imply a warranty that the product is merchantable or fit for a particular purpose, or that the product will actually conform to the illustrations and specifications. **THE WARRANTY CONTAINED HEREIN IS IN LIEU OF ALL OTHER WARRANTIES, EXPRESS OR IMPLIED, INCLUDING ANY IMPLIED WARRANTY OF FITNESS FOR A PARTICULAR PURPOSE.** SHARK does not authorize any other party, including authorized Dealers, to make any representation or promise on behalf of SHARK, or to modify the terms, conditions, or limitations in any way. It is the buyer's responsibility to ensure that the installation and use of SHARK products conforms to local codes. While SHARK attempts to assure that its products meet national codes, it cannot be responsible for how the customer chooses to use or install the product.

SHARK PRESSURE WASHERS
1-800-771-1881 • www.shark-pw.com

Form #97-720 • Revised 8/04a • Printed in U.S.A.